

Kta50-G16A 1500kw 1875kVA Cummins Diesel Generator 50Hz 60Hz Power **Diesel Generator Set**

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Minimum Order Quantity:
- Price: Negotiation

China

Minlong

ISO9001

L/C, D/A, D/P, T/T, Western Union,

1

- · Packaging Details: Wood case
- Delivery Time: 10-15 days
- Payment Terms:
 - MoneyGram 10000 set per week
- Supply Ability:



Product Specification

Model NO.:	KTA50-G16A
Stroke:	Four Stroke
Output Type:	AC Three Phase
• Enginestandbypower:	1760kw
Engineratedpower:	1650kw
Open Type Size:	5250*2300*2550(mm)
Silent Type Size:	6800*2400*2850(mm)
Open Type Weight:	11390kg
Silent Type Weight:	14890kg
Highlight:	1875kVA Cummins Diesel Generator,
	1500kw Cummins Diesel Generator,
	IP23 Cummins Diesel Generator



More Images







Product Description

Kta50-G16A Open/Silent Type 1500kw 1875kVA Cummins 50Hz 60Hz Power Diesel Generator Set Diesel Generator

Product Description:

1500KW/1875KVA Cummins diesel generator set

	Engine model	KTA50-G16A	
	Generator model	MY POWER1500-1-4	
	Enging Rated	1500KW/1875KVA	

Standard configuration

General description:

- 1. Engine:KTA50-G16A
- 2. Meet ambient temperature radiator, belt drive cooling fan, fan safety cover
- 3. 24VDC Charging generator
- 4. generator:Single bearing generator, protection IP23, class H insulation
- 5. Dry air filter, fuel filter, oil filter
- 6. Daily oil tank, shock absorber
- 7. Standard control panel, floating charger, cylinder water preheater
- 8. 2×12VDC Start battery and battery connection Cable.
- 9. One set of smoke exhaust elbow, bellows, flange and silencer.
- 10. Information on generator set usage

Generator parameters					
Voltage(V)	Frequency(Hz)	phase sequence	Power factor	Rated current(A)	Generator Prime Power(KW/KVA)
230/400	50	3	0.8	2700	1500KW/1875KVA

Relationship between engine power and altitude: if the altitude is above 1500 meters, the power will decrease by 4% every 300 meters.

Relationship between engine power and ambient temperature: the engine power is reduced by 3% for every 10 degrees above ambient temperature.

Sales commitment

The products provided are brand-new products, and each unit has undergone strict factory inspection. All products provide warranty service.

The warranty period shall be 12 months after the unit passes the commissioning and acceptance or 1000 hours of cumulative operation, whichever expires first.

Engine parameters		
Introduction of basic Parametes		
Engine Model	KTA50-G16A	
Displacement/L	50 L	
Rated speed rpm	1500	
Engine standby power KW	1760	
Engine rated power KW	1650	
Generator parameters		

Generator Model	MY POWER1500-1-4		
Phase sequence	3		
Wiring method	Three-phase four-wire, Y-type winding		
Number of bearings	1		
Power factor	0.8		
The protection grades	IP23		
Altitude requirement	≤1000m		
Field excitation	Brushless self-excitation		
Insulation Grade/Temperatu re Rise Grade	H/H		
Maximum overspeed	2250 rpm/min		
Power	1500KW/1875KVA		
Generator efficiency	≥95 %		
Voltage	400V		
Generator set p	parameters		
Voltage setting range	≥±10%		
Steady state voltage regulation rate	≤0.5%		
Transient voltage deviation (100% sudden power reduction)	≤+17%		
Transient Voltage Deviation (40% Sudden Power)	≤-6.5%		
Voltage Stability Time (100% Sudden Power Reduction)	≤2.8S		
Voltage Stability Time (40% Sudden Power)	≤2.5S		
Frequency adjustment range	≥±10% Adjustble		
Frequency volatility	≤±0.25%		
Transient frequency deviation (100% sudden power reduction)	≤+8%		
Transient frequency deviation (40% sudden power)	≤-5%		
Frequency Recovery Time (100% Sudden Power Reduction)	≤1.48S		
Frequency recovery time (40% sudden power)	≤1.35S		
Quality Standa	rd for Generator Sets		
	sets are designed, produced and tested strictly in accordance with the n be used in various environments, meeting the following relevant standards:		
ISO9001			
Data			

	autory Data	
	Generator factory information	Installation and Operation Manual of Generator Set
	Original factory data of control system	Acceptance Form for Installation and Commissioning of Generator Sets
	Original Factory Test Report of Generator Set	Certificate of Origin of Generator Set
Optional accessories		

Engine	Generator	Electrical system	
Intermediate water heating	Anti-condensation heater	Anti-condensation heater	
Oil preheater	Permanent magnet excitation system(PMG)	Unit control screen with three remote functions	
Air starting motor	Voltage Sag (Parallel)	ATS automatic load transfer screen	
Heavy Air Filter for Desert	Generators of other temperature rise grades	Full-automatic parallel screen for multiple units	
Heavy duty secondary muffler	RTD temperature sensor, 2 per phase	Remote control system separate from unit	
Fuel system	Other	Cooling system	
Base tank	Rain-proof unit	Split water tank	
Oil - water separator	Static sound box generator set	Remote water tank	
Fully automatic oil supply system	Vehicle-mounted power generation vehicl	Heat exchanger and external circulation cooling tower	
Buried fuel tank	Towing generator set	Marine cooling system	



1. High quality: use high-quality materials, establish a strict quality control system, and assign special personnel to be responsible for each production link from raw material procurement to assembly.

2. Professional R & D center: we employ designers with 15 years of working experience in diesel generator set industry and have been constantly improving our products.

3. Fast delivery: many goods are in stock and can be delivered within 5-15 days of placing an order.

4. Accept small orders: accept low minimum order quantity. One is available.






The picture display of the Cummins open type unit shows that every time we leave the factory, we undergo full load testing to ensure that the machine can be quickly used by customers.



The picture display of Cummins silent unit shows that we have a complete installation process and factory debugging system. Can achieve perfect factory delivery.

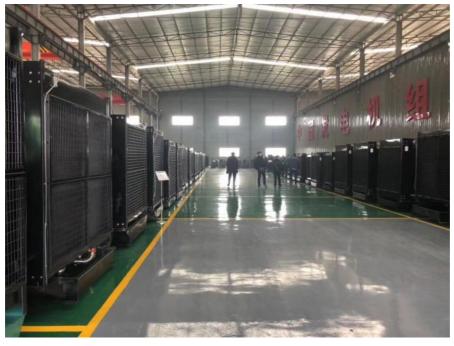

We have a large inventory displayed in the factory workshop. Can deliver quickly to every customer. contacts:Yang Thank you for watching and looking forward to your contact.



(0086)13380288786

yangzhipeng@minlongpower.com

@ diesels-generators.com

Guanglong Industrial Zone, Foshan, Guangdong, China